

Technical Documentation

Print Instructions



Standard Requirements:

- ▶ Paper quality must be at least matte 80% ISO white and preferably 100% recycled or FSC or PEFC certified (exception for Straubing plant).
- ▶ Paper must be printed on both sides.
- ▶ Printing technology must be offset or digital and made by a professional supplier.
- ▶ Paper size is a mix between ISO and American standards, with 2mm of tolerance.
- ▶ Exceptions are mentioned in the "Special requirements" field.
- ▶ Do not use printing inks containing mineral oil. Prohibited substances are:
 - MOAH (Mineral Oil Aromatic Hydrocarbons) with 1-7 aromatic rings for printing inks;
 - MOSH (Mineral Oil Saturated Hydrocarbons) with 16-35 carbon atoms for printing inks.

Special Requirements:

Use paper size A2 for printing
Fold to achieve A5 size
Printing to go on the inside of the folding

ECR F03X 402775
Release date

NOTE: For questions regarding the information in these print instructions or about the corresponding document, please contact

Author and department

Megan Bruce EIM3

Pages number

1

Template (paper size)

Other (info in special requirements)



The binding preview will appear here

Product family

NOMAD mounting template

SAP number

Z.01 X.000.659

Paper

80g/m2 IOR

Document version

01

Color

Grayscale


Cover

same as paper weight



Select other type of binding



DRAWER MOUNT DRILL TEMPLATE

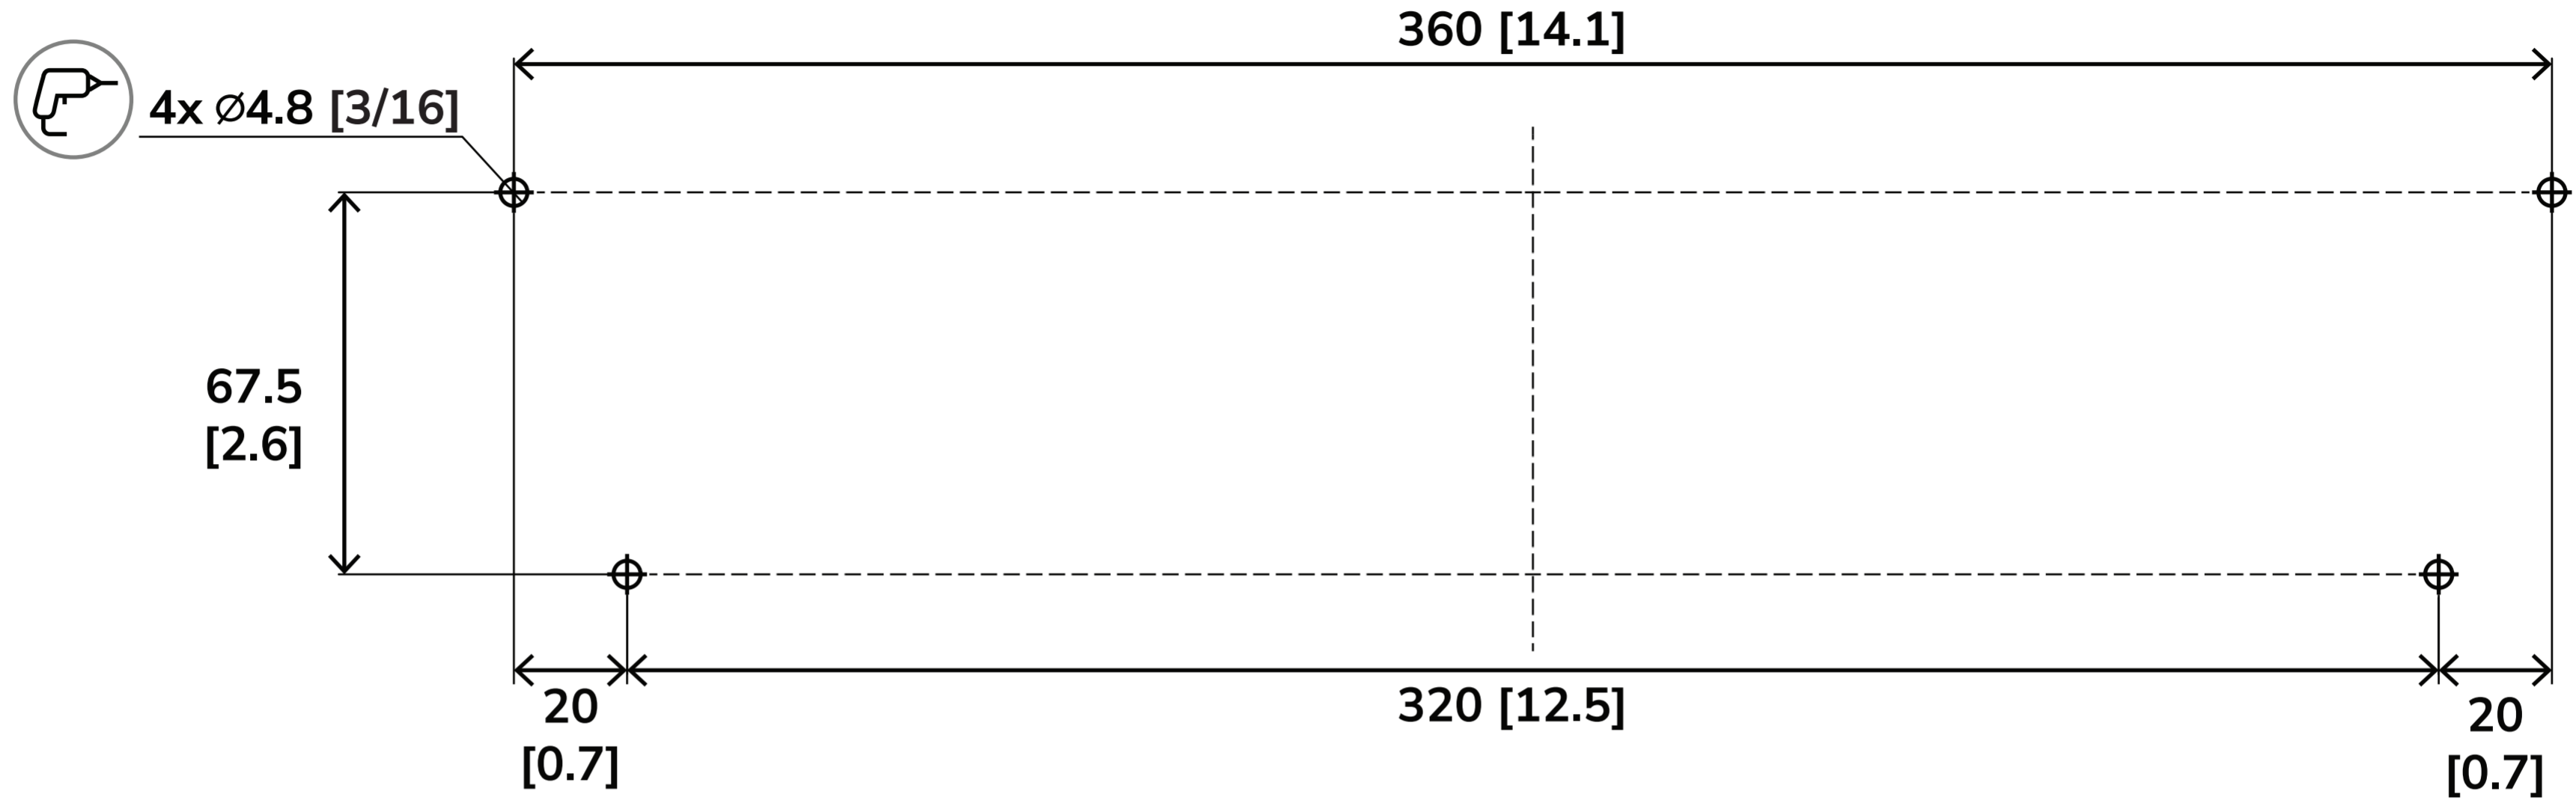

WALL MOUNT DRILL TEMPLATE

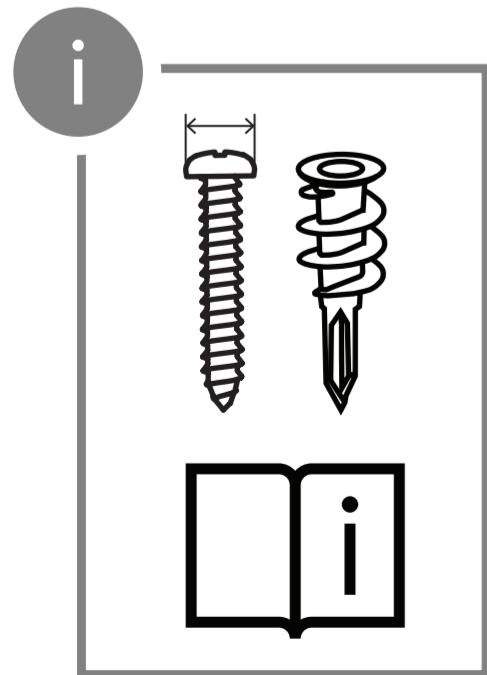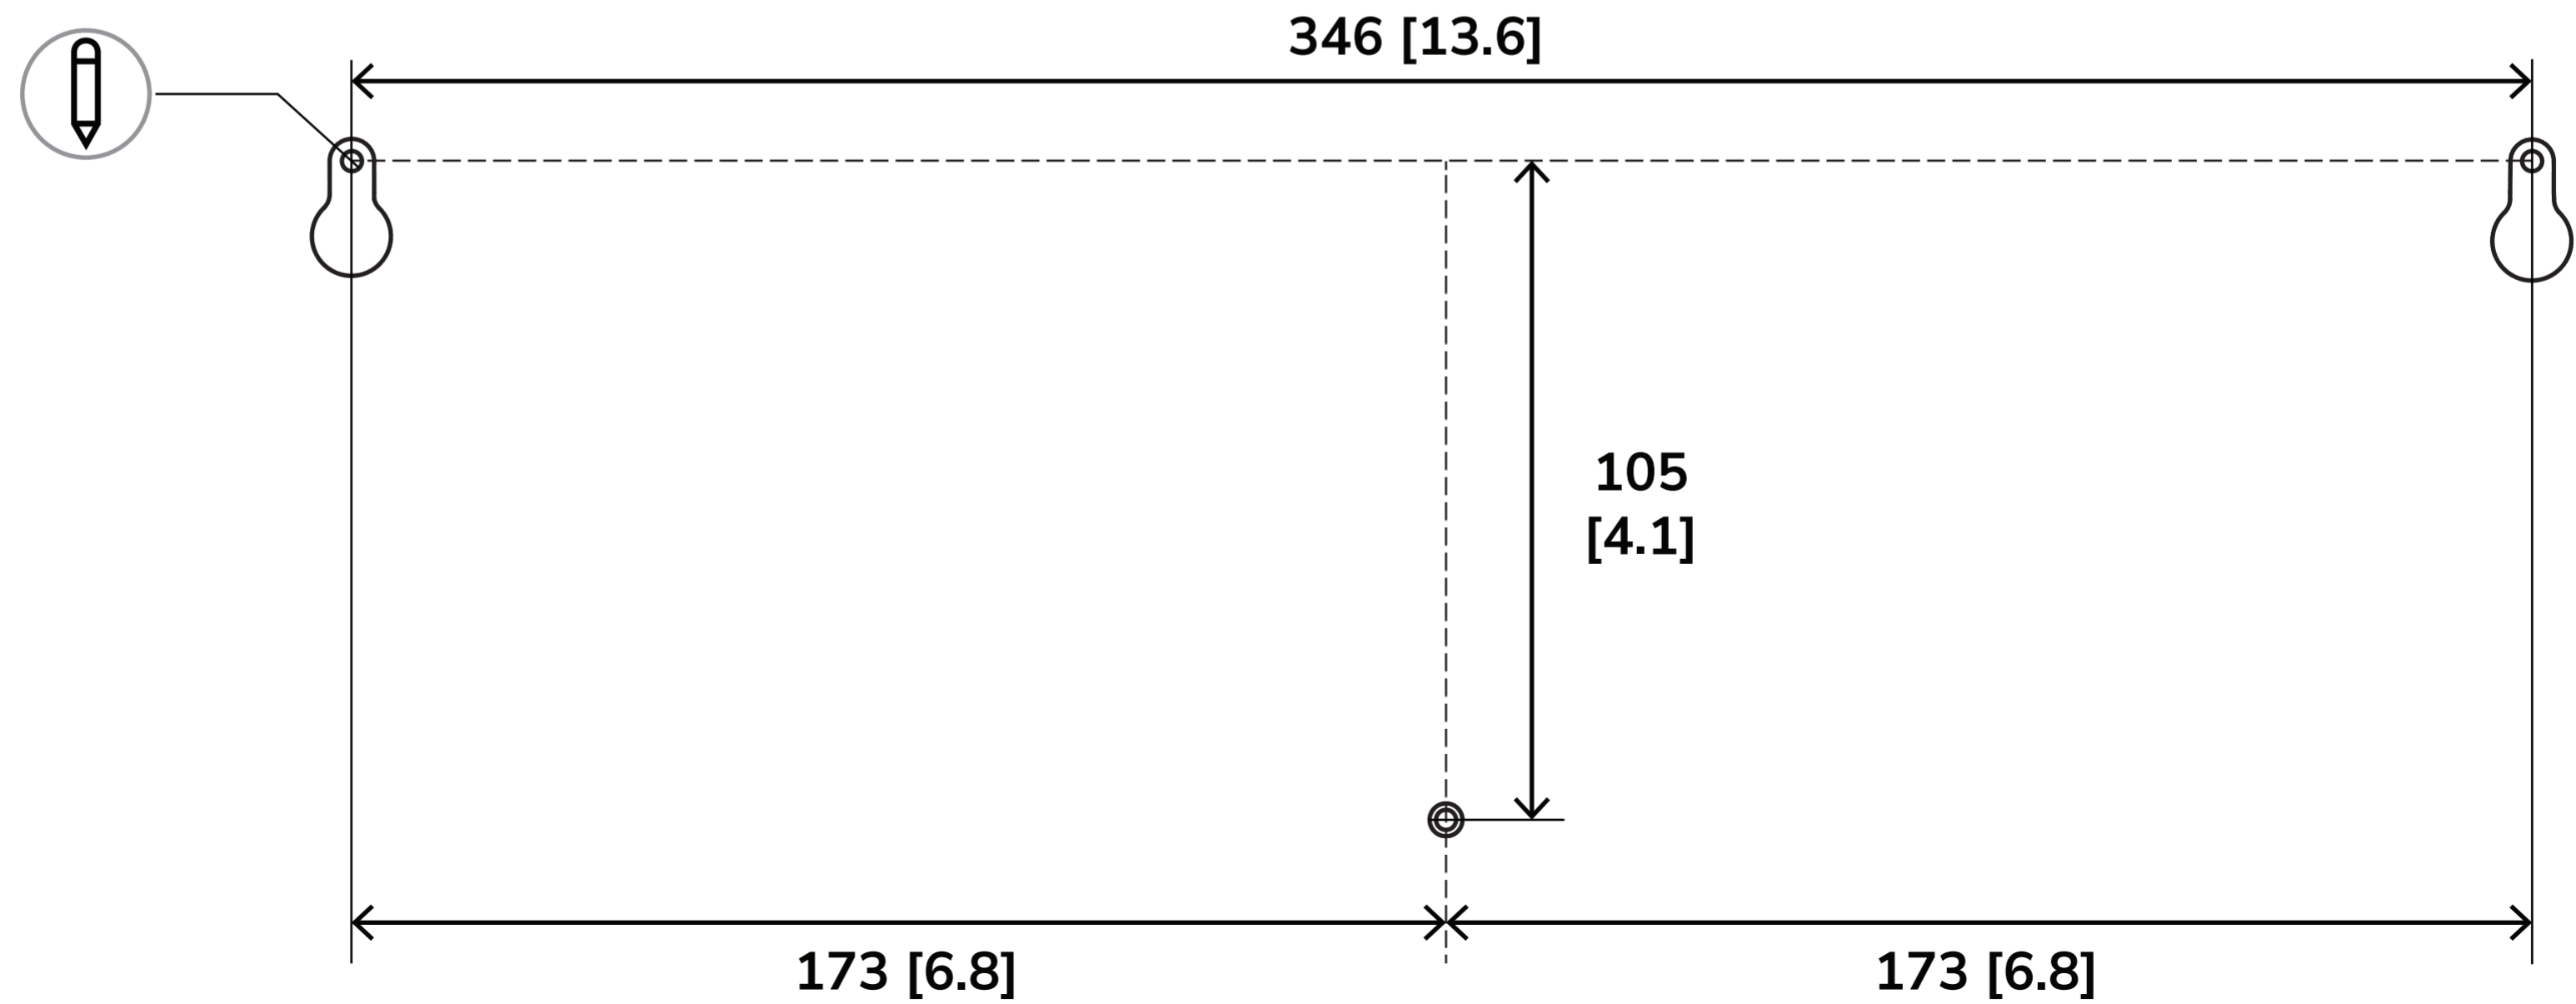

10mm

1:1
mm[in]