



PS-1F

Flush-Mount Power Supply



The RTS Audiocom Model PS-1F Power Supply mounts in a standard two-gang electrical outlet box. It may be used to power a single intercom channel containing up to 4 beltpack headset stations.

Line Drawings

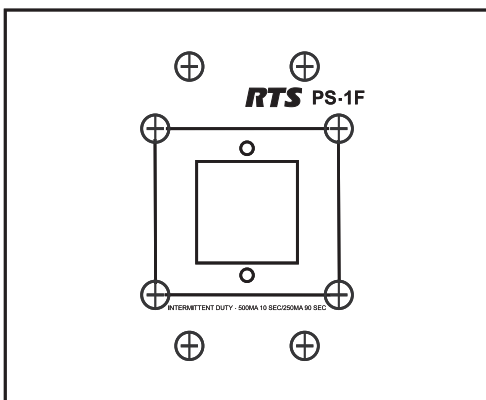

Specifications

General

Power Requirements 105-125 Vac, 50-60 Hz, 30 Watts
Output Voltage 24 Vdc regulated (less than 50 millivolts ripple)
Output Current 500 milliamps maximum continuous
240 milliamps short circuit current limiting
Channel Terminating Impedance (provided by PS-1F) 300 Ω $\pm$ 15%

Connectors

Intercom Channel Three screw terminals with wire clamps for No.14-22 AWG stranded or solid wire
Power Three-wire pigtails

Note

Not recommended for systems with over 300' (91.44m) of *total* cable runs.

Order Information

- PS-1F • Flush-Mount Power Supply

For ordering information, contact your regional sales representative at:
<http://rtsintercoms.com/us/intercom/contact>

The specification information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.